


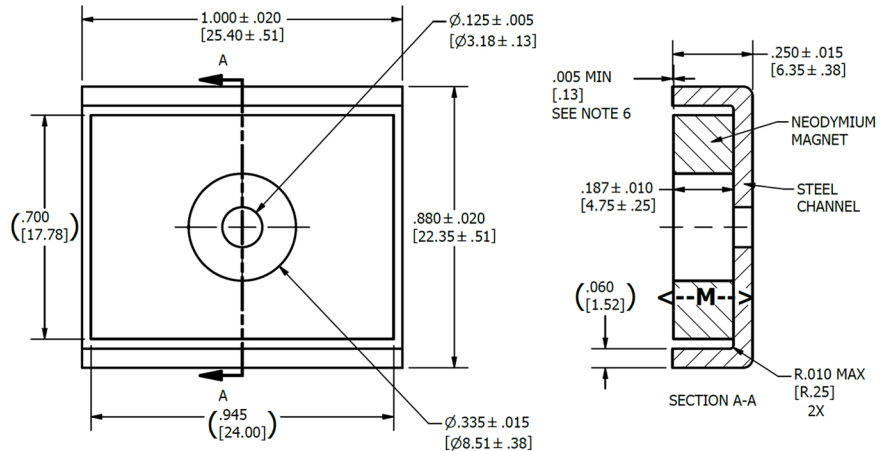

Channel magnets combine a permanent magnet with a steel channel that concentrates and directs the magnetic field. These durable assemblies provide strong holding force and are well suited for mounting, holding, positioning, and fixture applications.

Item	Width	Mounting	Tolerances
61ANZ002	0.88	0.125 CENTER HOLE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES Angular: $\pm 1^\circ$.X: +/- .03 .XX: +/- .015 .XXX: +/- .005 .XXXX: +/- .001 BREAK SHARP EDGES: .025 Max
Material	Height	Pounds Pull	
NdFeB	0.250	30	
Finish	Length	Temp Range	
Zinc	1.000	80°C	