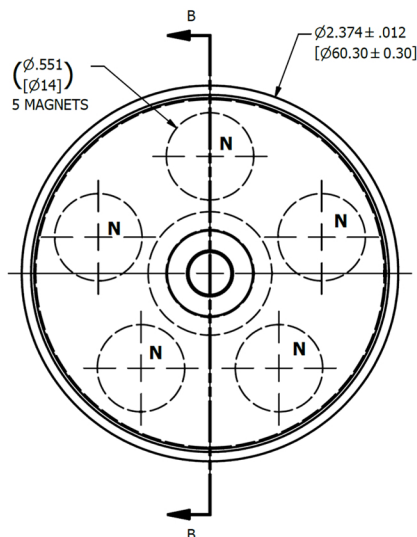


Round base magnets combine a permanent magnet with a steel cup that concentrates the magnetic field for increased holding force. These versatile assemblies are well suited for mounting, positioning, lifting, and holding applications.

| Item     | OD            | Pounds Pull | Tolerances                                                                                                                                                                                                           |
|----------|---------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 64ENC01  | 2.375         | 110         | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES<br><br>Angular: ± 1°<br><br>.X:        +/-    .03<br>.XX:       +/-    .015<br>.XXX:     +/-    .005<br>.XXXX:    +/-    .001<br><br>BREAK SHARP EDGES: .025 Max |
| Material | Height        | Temp Range  |                                                                                                                                                                                                                      |
| NdFeB    | 0.350         | 80°C        |                                                                                                                                                                                                                      |
| Finish   | Assembly Type |             |                                                                                                                                                                                                                      |
| Zinc     | Round Base    |             |                                                                                                                                                                                                                      |