

May 2, 2008

Notification of changes New shape of ferrite cores

In order to improve the assembly process for ELP58 cores in combination with I58 cores and ELP64 cores in combination with I64 cores for our customers, the shape of the related I cores I58 (B66293P* series) and I64 (B66295P* series) will be changed as shown in the enclosed specification.

Affected products:

- B66295P0000X187 (I64/5/50)
- B66295P0000X149 (I64/5/50)
- B66293P0000X187 (I58/4/38)

This change will not affect the quality and the electrical performance of the cores concerned.

Date of introduction: October 1, 2008

Enclosure Notifications of changes (PCN) I58/4/38 and I64/5/50
Data sheets I58/4/38 and I64/5/50

Contact Elly Das, IN TCF FER PM, Mch M/An
Kvetoslav Hejny, SMP IN TCF FER PD, Šumperk

Customers should address inquiries straight to their EPCOS sales contacts.



**Product / Process Change Notification
Produkt-/ Prozess-Änderungsmitteilung**

1. ID No. / ID-Nr.: CPP199		2. Date of announcement / Datum der Ankündigung: May 2, 2008	
3. Type / Produktgruppe: I58/4/38	Old ordering code / Alte Bestell-Nr.: B66293P0000X187	New ordering code / Neue Bestell-Nr.: No change / keine Änderung	Customer part number / Kundensachnummer:
4. Description of change / Beschreibung der Änderung: New core shape for I plate: replace "mini-legs" with identification marks of contact side (see enclosed data sheet)./ Neue Kernform für die I-Platte: Ersatz der Schenkel-Facetten durch Identifikationspunkte auf der Kontaktseite (siehe beiliegendes Datenblatt).			
5. Effect on the product or for customers (quality, specification, lead time) / Auswirkung auf das Produkt oder für den Kunden (Qualität, Spezifikation, Lieferzeiten): Change of core shape. / Änderung der Kernform.			
6. Quality assurance measures / Maßnahmen zur Qualitätssicherung: Without change./ Ohne Änderung.			
7. Scheduled date of introduction / Geplante Einführung: October 1, 2008 / 01.10.2008			
8. Customer feedback / Rückmeldung vom Kunden: If EPCOS does not receive notification to the contrary within a period of 10 weeks, EPCOS assumes that the customer agrees to the change. For an interim period we cannot rule out that old as well as new products will be shipped. Falls EPCOS innerhalb von 10 Wochen keine gegenteilige Mitteilung erhält, geht EPCOS davon aus, dass die geplante Änderung vom Kunden akzeptiert ist. Innerhalb einer Übergangszeit kann es vorkommen, dass sowohl alte wie auch neue Ware geliefert wird.			
Quality Management: Name: Petr Mrkos		Signature sgd. Mrkos	
Product Marketing: Tel: +49 89 636-23856 Fax: +49 89 636-22198 E-mail: florian.schuster@epcos.com Name: Florian Schuster		Signature sgd. Schuster	
Customer acknowledgement Bestätigung durch den Kunden		Signature	



Ferrites

I core

Series/Type:	I 58/4/38
Ordering code:	B66293P0000X187
Date:	2008-02-28
Version:	1

Preliminary data
Core set EILP 58
Combination:
ELP 58/11/38 with I 58/4/38

- To IEC 62317-9
- Delivery mode: single units

Magnetic characteristics

(per set)

$$\Sigma l/A = 0.22 \text{ mm}^{-1}$$

$$l_e = 67.7 \text{ mm}$$

$$A_e = 310 \text{ mm}^2$$

$$A_{\min} = 308 \text{ mm}^2$$

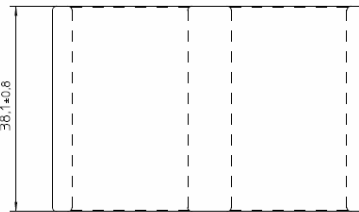
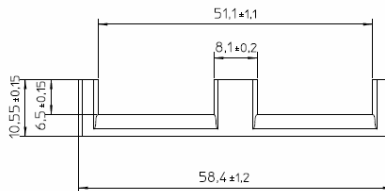
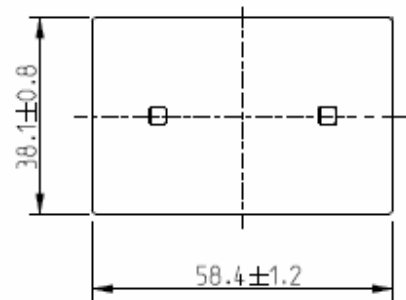
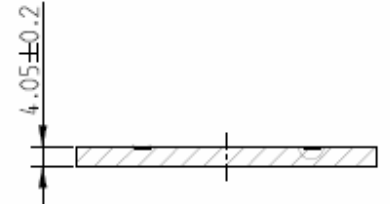
$$V_e = 21000 \text{ mm}^3$$

Approx. weight

110 g/set

Packing

 Standard styrofoam tray
 (size 200 mm x 300 mm)

ELP 58/11/38

I 58/4/38


Material	A_L value ¹⁾ nH	μ_e	Air gap mm	$P_{V\max}$ W/Set	Ordering code
N87	8400 +/-25%	1450	---	13 (100 kHz, 200 mT, 100 °C)	B66293P0000X187 (I core) B66293G0000X187 (ELP core)

1) Measurement parameter: 10 kHz, 0.25 mT, 100 turns, room temperature.

 A_L value is measured acc. to IEC62044-2. An appropriate wiring of cores with polished surface is used to improve reproducibility of the measurement. (It is recommended to rub the mating surfaces themselves six times in a circular or elliptic arc that matches the core profile before measuring A_L value).

Preliminary data

Cautions and warnings

Mechanical stress and mounting

Ferrite cores have to meet mechanical requirements during assembling and for a growing number of applications. Since ferrites are ceramic materials one has to be aware of the special behavior under mechanical load.

As valid for any ceramic material, ferrite cores are brittle and sensitive to any shock, fast changing or tensile load. Especially high cooling rates under ultrasonic cleaning and high static or cyclic loads can cause cracks or failure of the ferrite cores.

For detailed information see Data Book 2007, chapter "General – Definitions, 8.1".

Effects of core combination on AL value

Stresses in the core affect not only the mechanical but also the magnetic properties. It is apparent that the initial permeability is dependent on the stress state of the core. The higher the stresses are in the core, the lower is the value for the initial permeability. Thus the embedding medium should have the greatest possible elasticity.

For detailed information see Data Book 2007, chapter "General – Definitions, 8.2".

Heating up

Ferrites can run hot during operation at higher flux densities and higher frequencies.

NiZn-materials

The magnetic properties of NiZn-materials can change irreversible in high magnetic fields.

Processing notes

- The start of the winding process should be soft. Else the flanges may be destroyed.
- To strong winding forces may blast the flanges or squeeze the tube that the cores can no more be mount.
- To long soldering time at high temperature (>300 °C) may effect coplanarity or pin arrangement.
- Not following the processing notes for soldering of the J-leg terminals may cause solderability problems at the transformer because of pollution with Sn oxyd of the tin bath or burned insulation of the wire. For detailed information see Data Book 2007, chapter "Processing notes, 2.2".
- The dimensions of the hole arrangement have fixed values and should be understood as a recommendation for drilling the printed circuit board. For dimensioning the pins, the group of holes can only be seen under certain conditions, as they fit into the given hole arrangement. To avoid problems when mounting the transformer, the manufacturing tolerances for positioning the customers' drilling process must be considered by increasing the hole diameter.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.

The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.



**Product / Process Change Notification
Produkt-/ Prozess-Änderungsmitteilung**

1. ID No. / ID-Nr.: CPP200		2. Date of announcement / Datum der Ankündigung: May 2, 2008	
3. Type / Produktgruppe: I64/5/50	Old ordering code / Alte Bestell-Nr.: B66295P0000X187 B66295P0000X149	New ordering code / Neue Bestell-Nr.: No change / keine Änderung	Customer part number / Kundensachnummer:
4. Description of change / Beschreibung der Änderung: New core shape for I plate: replace "mini-legs" with identification marks of contact side (see enclosed data sheet)./ Neue Kernform für die I-Platte: Ersatz der Schenkel-Facetten durch Identifikationspunkte auf der Kontaktseite (siehe beiliegendes Datenblatt).			
5. Effect on the product or for customers (quality, specification, lead time) / Auswirkung auf das Produkt oder für den Kunden (Qualität, Spezifikation, Lieferzeiten): Change of core shape./ Veränderung der Kernform.			
6. Quality assurance measures / Maßnahmen zur Qualitätssicherung: Without change. / Ohne Änderung.			
7. Scheduled date of introduction / Geplante Einführung: October 1, 2008 / 01.10.2008			
8. Customer feedback / Rückmeldung vom Kunden: If EPCOS does not receive notification to the contrary within a period of 10 weeks, EPCOS assumes that the customer agrees to the change. For an interim period we cannot rule out that old as well as new products will be shipped. Falls EPCOS innerhalb von 10 Wochen keine gegenteilige Mitteilung erhält, geht EPCOS davon aus, dass die geplante Änderung vom Kunden akzeptiert ist. Innerhalb einer Übergangszeit kann es vorkommen, dass sowohl alte wie auch neue Ware geliefert wird.			
Quality Management: Name: Petr Mrkos		Signature sgd. Mrkos	
Product Marketing: Tel: +49 89 636-23856 Fax: +49 89 636-22198 E-mail: florian.schuster@epcos.com Name: Florian Schuster		Signature sgd. Schuster	
Customer acknowledgement Bestätigung durch den Kunden		Signature	



Ferrites

I core

Series/Type: I 64/5/50
Ordering code: B66295P0000X1**
Date: 2008-02-28
Version: 1

Ferrites
I core
I 64/5/50
Preliminary data
Core set EILP 64
Combination:
ELP 64/10/50 with I 64/5/50

- To IEC 62317-9
- Delivery mode: single units

Magnetic characteristics

$$\Sigma l/A = 0.13 \text{ mm}^{-1}$$

$$l_e = 69.7 \text{ mm}$$

$$A_e = 519 \text{ mm}^2$$

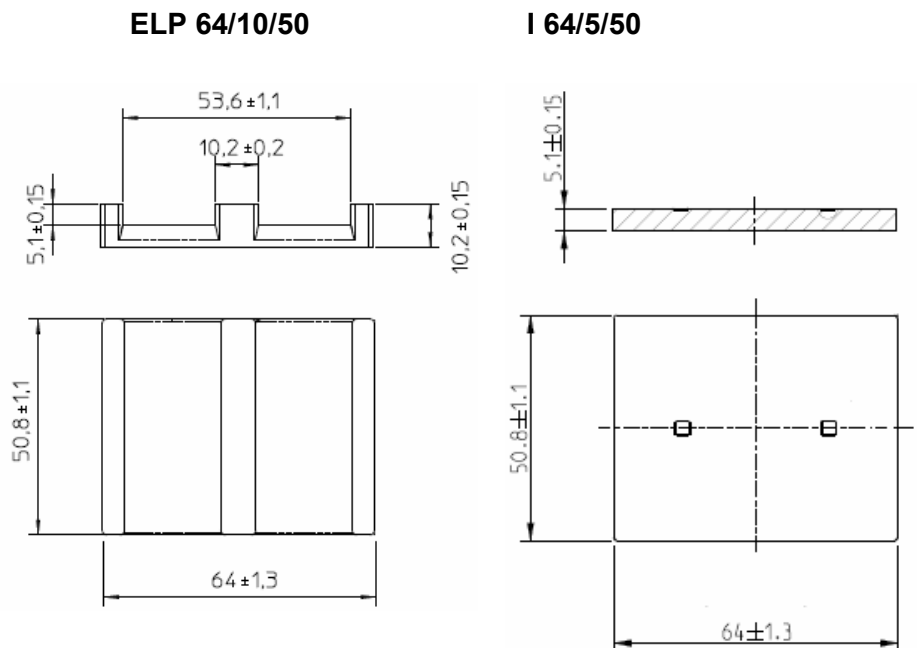
$$A_{\min} = 518 \text{ mm}^2$$

$$V_e = 36200 \text{ mm}^3$$

Approx. weight

185 g/set

Packing

 Standard styrofoam tray
 (size 200 mm x 300 mm)


Material	A_L value ¹⁾ nH	μ_e	Air gap mm	$P_{V_{\max}}$ W/Set	Ordering code
N87	14000 +/-25%	1450	---	23 (100 kHz, 200 mT, 100 °C)	B66295P0000X187
N49	8900 +/-30%	950	---	9.3 (500 kHz, 50 mT, 100 °C)	B66295P0000X149

1) Measurement parameter: 10 kHz, 0.25 mT, 100 turns, room temperature.

A_L value is measured acc. to IEC62044-2. An appropriate wiring of cores with polished surface is used to improve reproducibility of the measurement. (It is recommended to rub the mating surfaces themselves six times in a circular or elliptic arc that matches the core profile before measuring A_L value).

Preliminary data

Cautions and warnings

Mechanical stress and mounting

Ferrite cores have to meet mechanical requirements during assembling and for a growing number of applications. Since ferrites are ceramic materials one has to be aware of the special behavior under mechanical load.

As valid for any ceramic material, ferrite cores are brittle and sensitive to any shock, fast changing or tensile load. Especially high cooling rates under ultrasonic cleaning and high static or cyclic loads can cause cracks or failure of the ferrite cores.

For detailed information see Data Book 2007, chapter "General – Definitions, 8.1".

Effects of core combination on AL value

Stresses in the core affect not only the mechanical but also the magnetic properties. It is apparent that the initial permeability is dependent on the stress state of the core. The higher the stresses are in the core, the lower is the value for the initial permeability. Thus the embedding medium should have the greatest possible elasticity.

For detailed information see Data Book 2007, chapter "General – Definitions, 8.2".

Heating up

Ferrites can run hot during operation at higher flux densities and higher frequencies.

NiZn-materials

The magnetic properties of NiZn-materials can change irreversible in high magnetic fields.

Processing notes

- The start of the winding process should be soft. Else the flanges may be destroyed.
- To strong winding forces may blast the flanges or squeeze the tube that the cores can no more be mounted.
- To long soldering time at high temperature (>300 °C) may effect coplanarity or pin arrangement.
- Not following the processing notes for soldering of the J-leg terminals may cause solderability problems at the transformer because of pollution with Sn oxyd of the tin bath or burned insulation of the wire. For detailed information see Data Book 2007, chapter "Processing notes, 2.2".
- The dimensions of the hole arrangement have fixed values and should be understood as a recommendation for drilling the printed circuit board. For dimensioning the pins, the group of holes can only be seen under certain conditions, as they fit into the given hole arrangement. To avoid problems when mounting the transformer, the manufacturing tolerances for positioning the customers' drilling process must be considered by increasing the hole diameter.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.

The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.